

RUN WITH RAM TRAILER



FUEL TANKER GROUP

54000 LT FUEL TANKER SEMI TRAILER




# TECHNICAL SPECIFICATION

## 54000 LT FUEL TANKER SEMI TRAILER

<b>Fifth Wheel Height</b>	—1300mm. Suitable for 6x4 truck												
<b>Body</b>	—Cylindrical												
<b>King Pin</b>	—2" or 3, 5"king – pin detachable from below made by SAE standards 8 bolt type.												
<b>Volume</b>	—Total Net Volume: <b>54.000 lt</b> — <b>Six Compartment</b>												
	<table border="1"> <tr> <td><b>1. Compartment</b></td> <td>13.500lt</td> </tr> <tr> <td><b>2. Compartment</b></td> <td>9.000lt</td> </tr> <tr> <td><b>3. Compartment</b></td> <td>4.500lt</td> </tr> <tr> <td><b>4. Compartment</b></td> <td>13.500lt</td> </tr> <tr> <td><b>5. Compartment</b></td> <td>9.000lt</td> </tr> <tr> <td><b>6. Compartment</b></td> <td>4.500lt</td> </tr> </table>	<b>1. Compartment</b>	13.500lt	<b>2. Compartment</b>	9.000lt	<b>3. Compartment</b>	4.500lt	<b>4. Compartment</b>	13.500lt	<b>5. Compartment</b>	9.000lt	<b>6. Compartment</b>	4.500lt
<b>1. Compartment</b>	13.500lt												
<b>2. Compartment</b>	9.000lt												
<b>3. Compartment</b>	4.500lt												
<b>4. Compartment</b>	13.500lt												
<b>5. Compartment</b>	9.000lt												
<b>6. Compartment</b>	4.500lt												
<b>Axles</b>	—3 x 12000 kg carrying capacity <b>TURKISH Drum Axle</b> brand												
<b>Distance between Axles</b>	—1320 mm												
<b>Brake and Suspension System</b>	— <b>AIR Suspension (Only front axles LIFTING)</b> — <b>Drum Brake System</b> — <b>ABS WABCO Brake System</b> — <b>Pneumatically drainage safety valve</b>												
<b>Landing Gears</b>	—Double Speed, —24000 kg carrying capacity, — <b>OMS brand mechanical Landing Gears,</b>												
<b>Rear Bumper</b>	—Suitable 70/221 / AT-version of the rear bumper,												
<b>The rear overhang</b>	— <b>Distance from the end of the tank on the bumper should be more then 300mm</b>												
<b>Wheel Chock</b>	—Carriers with 2 unit wheel chock												
<b>Tires &amp; Wheels</b>	—16+1 PCS 12 R 22,5 — <b>KELLY OR LASSA OR EQL</b>												
<b>Loading, unloading System</b>	—Suitable for loading from top, and bottom —In the lock box on the right side of tanks 6 PCS 4" CIVACON API cabling with the protective cover.  —Discharge of the fuel will be made true 3" discharge adapter connected to the hose with quick cabling.  <b>6 PCS BOTTOM VALVE CIVACON</b> — <b>SIX pcs. 500mm manhole cover to be suitable for loading from top and bottom.</b> <b>MENHOLE COVER WILL BE DOUBLE LOCKING AND ALSO FOR SEALING COVER SYTEM CIVACON BRAND</b>												



54000 LT FUEL TANK

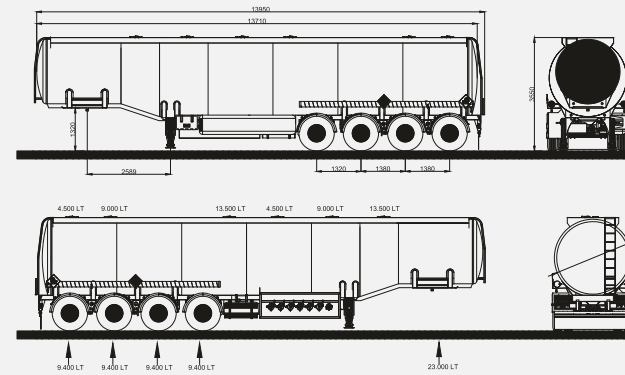

**RAM İTHALAT İHRACAT İNŞAAT NAKLİYAT SANAYİ VE TİCARET LİMİTED ŞİRKETİ**

Konya Organize Sanayi Bölgesi Gönülveren Sok No : 20/5 Selçuklu / KONYA

www.ramtreyler.com

info@ramtreyler.com

ramtreyler

+90 552 642 12 84

+255 752 914 241

Tanzania Service and Spare Parts Sales Point



RAM TREYLER, reserves the right of making changes in the technical specifications and components without making any prior notice. Some components seen on the photographs and specifications seen here may not be standard features of the vehicles. There may have been some changes after publication of this document. No right can be claimed on a sign or numbers used by seller or buyer to define a product on ordering. Differences in colors are due to printing techniques.



TSEK

